


## Kerabit Damp-proof courses

Päivitetty 25.4.2023 Tulostettu 20.5.2024

Kerabit Damp-proof courses are intended to serve as capillary breaks between the footing and the foundation as well as between the foundation and walls. The strips are made of SBS-bitumen and they feature a sand or powder coating.

A wide range of sizes is available, with some products suitable for torching.

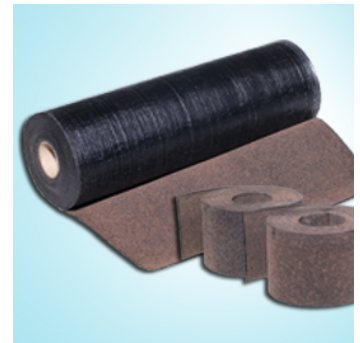

## Technical data

Manufacturer / Manufactured for	Kerabit Oy, Lohja plant
Country of origin	Finland
Conformity marking	CE mark
Quality control	Quality control agreement between the Plant and Eurofins Expert Services Oy
Specific thickness	2,2 - 4,4 mm depending on the product
Nominal weight	2100 - 5000 g/m <sup>2</sup> depending on the product
Surface type	sand or slate granule
Rolls size	0,1x10 m, 0,15x10 m, 0,20x10 m, 0,25x10 m, 0,33x8 m torch-on and 0,5x8 m torch-on

## Additional information

### Application

Kerabit Damp-proof courses are intended to serve as capillary breaks between the footing and the foundation as well as between the foundation and walls.

### Handling and storage

Modified bitumen membranes are stored on pallets in a dry and cool place in an upright position. The rolls must be protected with plastic hoods or tarps. When the temperature exceeds + 40 °C, the rollers must be stored in a location that is protected from sunlight.

## Checklist

Kerabit sealing adhesive for sealing seams and details.